

## **Minimum Clearances**

### **from the Fireplace to Combustible Materials**

Glass Front.....	914 mm
Floor .....	0 mm
Rear .....	13 mm
Sides .....	13 mm
Top .....	38 mm
Ceiling* .....	787 mm

\*The clearance to ceiling is measured from the top of the unit, excluding the standoffs.

## **Minimum Clearances**

### **from the Vent Pipe to Combustible Materials**


<b>Vertical Sections</b> .....	25 mm
<b>Horizontal sections</b>	
Top .....	75 mm
Bottom .....	25 mm
Sides .....	25 mm
<b>At Wall Firestops</b>	
Top .....	75 mm
Bottom .....	25 mm
Sides .....	25 mm

For minimum clearances, see the direct vent termination clearance.

## MINIMUM CLEARANCES

### REQUIRED FOR HORIZONTAL BALANCED FLUE TERMINALS

### OR THE FLUE TERMINALS OF OUTDOOR APPLIANCES

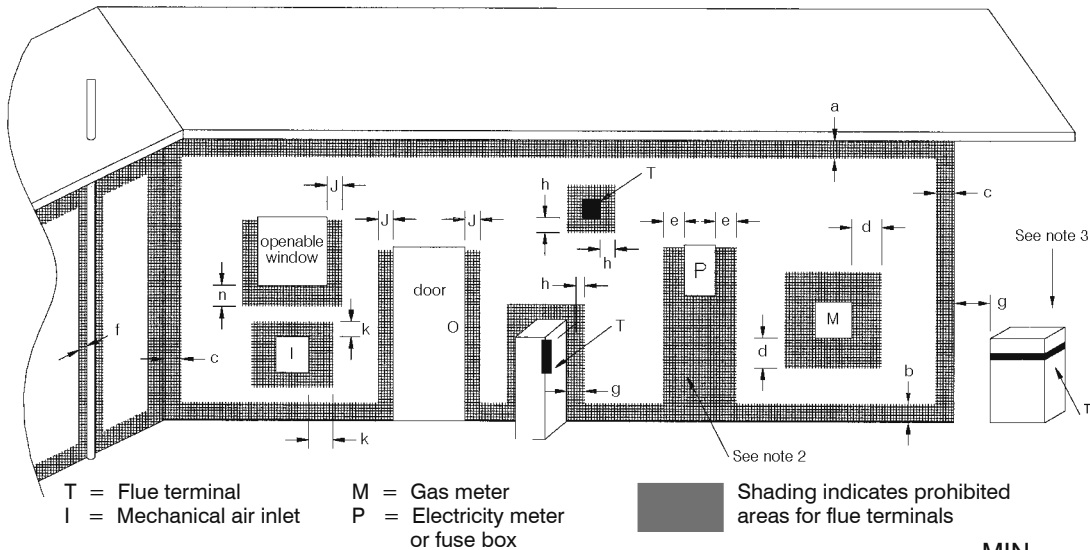

	MIN. CLEARANCE (mm)
a - Below eaves, balconies or other projections: Appliances up to 50 MJ/h input .....	300
Appliances over 50 MJ/h input.....	500
b - From the ground or above a balcony .....	300
c - From a return wall or external corner .....	500
d - From a gas meter (M) .....	1000
e - From an electricity meter or fuse box (P) .....	500
f - From a drain or soil pipe .....	150
g - Horizontally from any building structure (unless appliance approved for closer installation) or obstruction facing a terminal .....	500
h - From any other flue terminal, cowl, or combustion air intake .....	500
j - Horizontally from an openable window, door, non-mechanical air inlet, or any other opening into a building, with the exception of sub-floor ventillation:	
Appliances up to 150 MJ/h input .....	500
Appliances over 150 MJ/h input.....	1500
k - From a mechanical air inlet, including a spa blower .....	1500
n - Vertically below an openable window, non-mechanical air inlet or any other opening into a building, with the exception of sub-floor ventillation, up to 50 MJ/h input .....	150

- NOTES:** 1. All distances are measured vertically or horizontally along the wall to a point in line with the nearest part of the terminal.  
 2. Prohibited area below electricity meter or fuse box extends to ground level.  
 3. See clause 5.13.6.6 for restrictions on a flue terminal under a roofed area.  
 4. See Appendix J, Figure J1(a) and J2(a) for clearances required from flue terminal to a LP Gas cylinder. A flue terminal is considered to be a source of ignition.